

BP5MS Tech Sheet

Balboa Water Group

Part Number: **56369** 4kW 800 Incoloy Heater Element
 56370 4kW 825 Incoloy Heater Element
 56371 4kW Titanium Heater Element

UL System Model: BP15-BP5MS-BJ-M
Software ID: M100_200 V12.0
Software Version: 12.0
Hex File: BP1500_12.0_BP15MS_30_1.hex
Configuration Signature: B8D9E3C4

Eng. Project: 3932

Base PCBs / PCBA's:

Power Board: 22117_B / 56285

Logic Board: 22121_E / 56372

Control Panels:

TP 600 50322

Software Version 2.6 and later

TP400T 50332

Software Version 2.6 and later

Auxiliary Panels

AX10A2 50334 (Operates MicroSilk®)



User Interface and Programming Guide:

http://service.balboa-instruments.com/zz40940_download.zip



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

System Revision History

Part #	EPN	Date	Originator	Changes Made
56369	3932	01-23-13	Balboa	Initial Sample Configuration
56370				Based on 56278 to run MicroSilk®
56371				

MicroSilk® is a registered trademark of Jason International



Setup Changes with DIP Switch 1 ON

Read and understand these instructions before beginning this process.


Know the Setup Number you want before you power up the spa and wait to power up the spa until you're ready to change the Setup Number.

The system must be in Test Mode, so move Switch 1 to the ON position. The Test Menu will then be available.

Power up the spa, and press any button once to Link the panel. (Note: Switch 1 can be moved to the ON position immediately after power-up, if preferred - Danger! High Voltage will be present!)

You will have 1 minute to complete the setup change after you manually exit Priming Mode. (Once familiar with the process, the Setup change should take less than 15 seconds.)

→ As soon as Switch #1 is placed in the ON position, The temperature will show "T" after it instead of F or C, indicating the System is in Test Mode



DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!


Move DIP Switch 1 (on S1 on the Logic circuit board) to ON.

The system will enter Test Mode.

Moving DIP Switch 1 to OFF will exit Test Mode.



When the panel displays RUN PMPS PURG AIR, press any Temperature button ONCE to exit Priming Mode. You should see "---T" where the T indicates the system is in Test Mode.



Continued on Next Page.




Setup Changes – Continued

Again, **You will have 1 minute** to complete the setup change after you manually exit Priming Mode.

Immediately after exiting Priming Mode, press this sequence of buttons: Warm*, Light, Warm, Warm, Warm, Warm. Continue to press Warm until the display shows the Setup Number (S-01, S-02, etc.) you want to switch to. When the correct setup number is showing, press Light once, and the system will reset, using the newly-selected Setup from that point on.

Move DIP Switch 1 to the OFF position to take the spa out of Test Mode. °F or °C will replace °T.


Using a permanent marker, write the Setup number on the Setup label mounted inside the system lid (right). This is very important to any service person in the future who may need to replace a circuit board or system and needs to change the Setup on a replacement part while in the field.

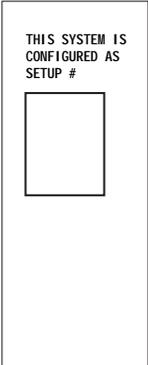

NOTE: Changing the Setup may require wiring changes as well - refer to the wiring diagram or wiring diagram addendum.

Key

- Indicates Flashing or Changing Segment
- Indicates Alternating or Progressive Message - every 1/2 second
- ⌄ A temperature button, used for "Action"
- ☼ Light or dedicated "Choose" button, depending on control panel configuration
- Waiting time - varies depending on function

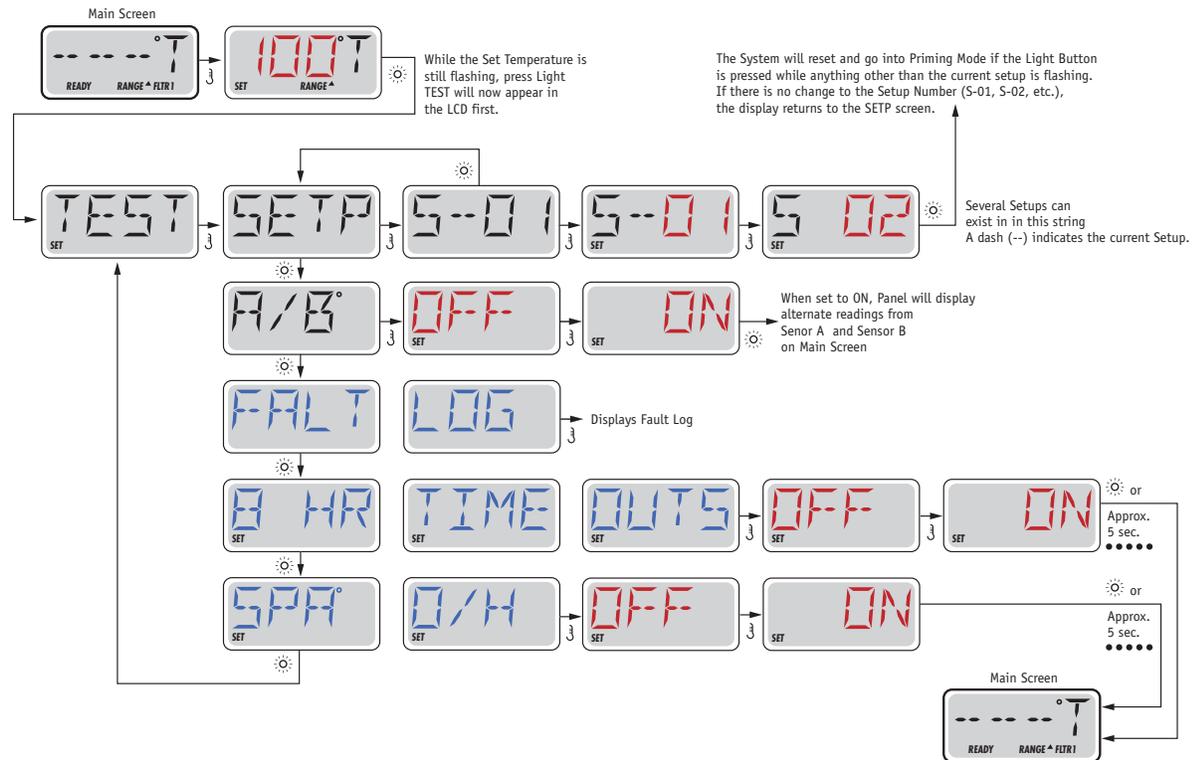

*If the Control Panel does not have a Warm (Up) button, but rather a single Temp button, use the Temp button in place of the Warm button in the instruction above. (The flow chart assumes a single Temperature Button.)



Configuration Options

General Features

Feature	Default
Pump 1 in Filter Cycle (Circ Only)	No
Pump 1 Low Timer	30 Minutes
General Pump Timer	15 Minutes
Blower Timer	30 Minutes
Mister Timer (N/A)	15 Minutes
Light Timer	240 Minutes
Circ	Like P1 Low
Cleanup Cycle	<i>30 Minutes</i>
Cleaup as Preference setting	Yes
Ozone	With Heater Pump*
Ozone Suppression	OFF
Pump Purge	60 Seconds
Blower Purge	30 Seconds
Mister Purge (N/A)	5 Seconds

* The Heater Pump can be either a Circ Pump or Pump 1 Low.



Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options

Temperature Features

Feature Default

Temperature Display

°F

All temperatures must be specified in °F. The system converts °F to °C dynamically. If Celsius is required for default settings, choose a desired °C value that (after rounding) corresponds to a Fahrenheit value.

°C	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
°F	39	41	43	45	46	48	50	52	54	55	57	59	61	63	64	66	68	70	72
°C	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
°F	73	75	77	79	81	82	84	86	88	90	91	93	95	97	99	100	102	104	

Hi-Range Min. Set Temp

80°F

Hi-Range Max. Set Temp

104°F

Hi-Range Default Temp*

100°F

Lo-Range Min. Set Temp

50°F

Lo-Range Max. Set Temp

80°F

Lo-Range Default Temp*

70°F

Freeze Threshold

44°F

Temp Lock Type

Temp + Settings

Time Features

Feature

Default

Time Format*

12 Hour

Filter 1 Start Hour*

8:00 PM (20:00)

Filter 1 Duration*

2 Hours

Filter Cycle 2 Default*

OFF

Filter 2 Start Hour*

8:00 AM (08:00)

Filter 2 Duration*

15 Minutes

Light Cycle

Disabled

Light Cycle Default*

OFF

Light Cycle Start Hour*

9:00 PM (21:00)

Light Cycle Duration*

15 Minutes

**May be changed by end-user (if Enabled)*



Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options

Reminder Features

Feature	Default
Reminders Shown*	<i>Yes</i>
Check pH	<i>OFF</i>
Check Sanitizer	<i>OFF</i>
Clean Filter	30 Days
Test GFCI	<i>65 Days</i>
Drain Water	<i>100 Days</i>
Change Cartridge	OFF
Clean Cover	<i>OFF</i>
Treat Wood	<i>OFF</i>
Change Filter	365 Days

Special Features

Feature	Default
Special Amperage Rule 1	No Limitation
Special Amperage Rule 2	No Limitation
Drain Mode	Disabled
Demo Mode	Disabled
Automatic GFCI Test	Disabled
Ozone Slaved to Heater Pump	<i>Yes</i>

**Editable by end-user*

Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options


TP400 Control Panel Features

Feature	TP400T	TP400W
Button 1	<i>Temperature</i>	Up
Button 2	<i>Jets 1</i>	Down
Button 3	<i>Light 1</i>	Light 1
Button 4	<i>MicroSilk®</i>	Jets 1
LED B1	<i>Heat ON</i>	Heat ON
LED B2	<i>Jets 1</i>	Unused
LED B3	<i>Light 1</i>	Light 1
LED B4	<i>MicroSilk®</i>	Jets 1

TP400T

50332 ►

Includes Overlay PN 12714

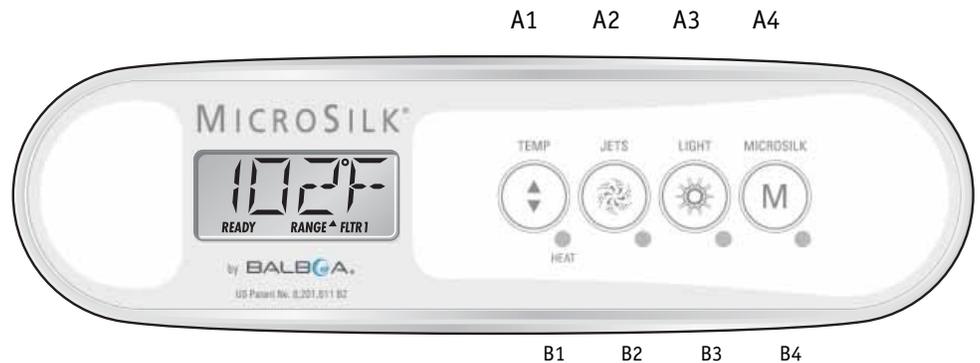

MicroSilk® is a registered trademark of Jason International

Download the User Interface and Programming Guide here:
http://service.balboa-instruments.com/zz40940_download.zip
Blue Indicates New Custom Configuration Default (Setup 1)



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options

TP600 Control Panel Features

Feature	Default
Button 1	<i>Jets 1</i>
Button 2	<i>MicroSilk®</i>
Button 3	<i>Flip</i>
Button 4	<i>Up</i>
Button 5	<i>Light 1</i>
Button 6	<i>Down</i>
LED 1	<i>Jets 1</i>
LED 2	<i>MicroSilk®</i>
LED 3	<i>Light 1</i>
LED 4	<i>Heat ON</i>

TP600

50332 ►

Includes overlay PN 12740



MicroSilk® is a registered trademark of Jason International

Download the User Interface and Programming Guide here:
http://service.balboa-instruments.com/zz40940_download.zip
Blue Indicates New Custom Configuration Default (Setup 1)




Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.

Configuration Options


Auxilliary Panel Features

Feature	Default
Aux Button A1	Jets 1
Aux Button A2	<i>MicroSilk®</i>
Aux Button A3	<i>Unused</i>
Aux Button A4	Light


AX10 A1	No O/L	52803
AX10 A2	MicroSilk	50334
Includes Overlay PN 12742		
AX10 A3	No O/L	52805
AX10 A4	No O/L	52806



AX20 A1A2	No O/L	52800
AX20 A1A3	No O/L	52801
AX20 A1A4	No O/L	52802

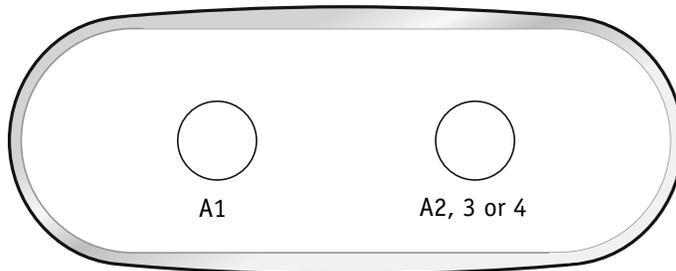

AX40	No O/L	52799
------	--------	-------

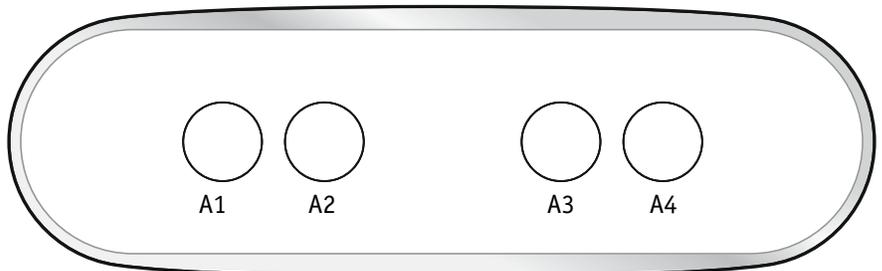

MicroSilk® is a registered trademark of Jason International



Blue Indicates New Custom Configuration Default (Setup 1)

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. All material copyright of Balboa Water Group.